




MAKING FABULOUS PRODUCTS



www.nexisled.com

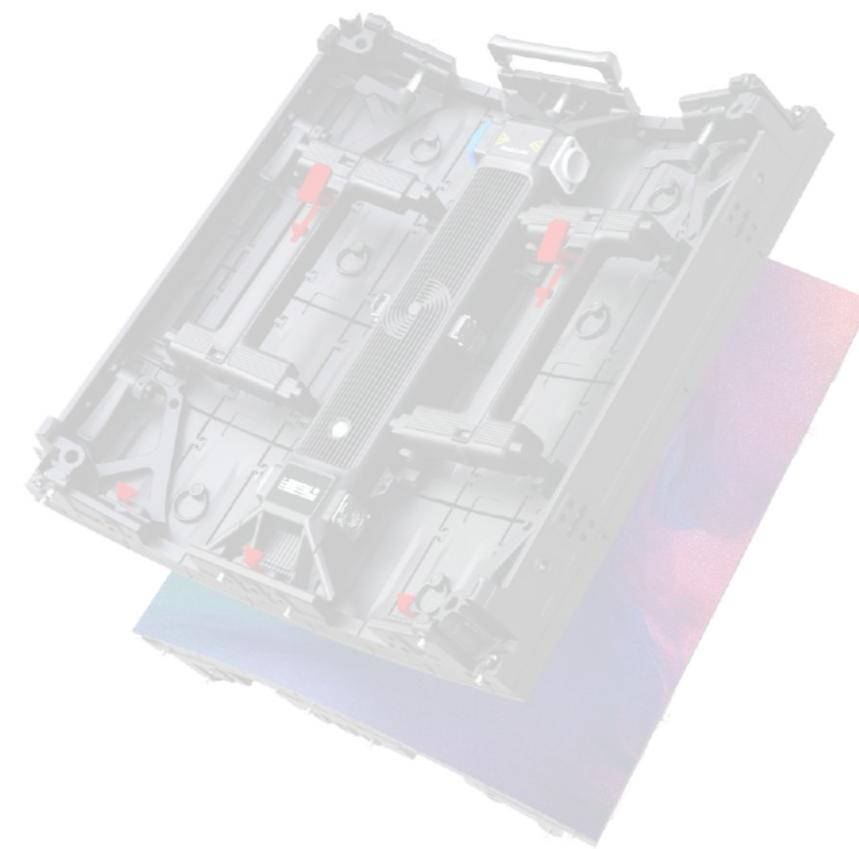

RENTAL SOLUTIONS

RENTAL

MINI 4 IN 1 SOLUTIONS



Alpha Series(Mini 4in1 LED) ●

Alpha Max Series(Mini 4in1 LED) ●

Spider Series(Mini 4in1 LED) ●

Master Series(Mini 4in1 LED) ●

FC Series(Mini 4in1 LED) ●

X Series(Mini 4in1 LED) ●

FABULUX LED

Alpha Series(Mini 4in1 LED)


RENTAL MINI 4IN1 SOLUTION




Dimension: 500x500x80mm
 Pixel Pitch: 1.95mm/2.6mm
 Applications: XR studios, TV stations, exhibitions, conferences, etc.

Key Features:


- Unique Mini 4in1 LED, can bear 14.2KG impact force per pixel.
- High contrast ratio to 12,000:1.
- Reduce moire effect during camera shooting.
- High brightness up to 1,500nits.
- High refreshment up to 7,680Hz.
- Ideal solution for XR industry.




Unique Mini 4in1 LED, can bear 14.2KG impact force per pixel



High brightness up to 1,500nits



High refreshment up to 7,680Hz



99.9% DCI-P3

Item Number	FAB-AP1.95	FAB-AP1.95H	FAB-AP2.6	FAB-AP2.6H
Pixel Pitch(mm)	1.95	1.95	2.6	2.6
Pixel Density(dots/SQM)	262,144	262,144	147,456	147,456
LED Type	Mini 4in1	Mini 4in1	Mini 4in1	Mini 4in1
Module Resolution(pixels)	128*128	128*128	96*96	96*96
Module Size(mm)	250*250	250*250	250*250	250*250
Cabinet Size(mm)	500*500	500*500	500*500	500*500
Cabinet Weight(KG)	7.8	7.8	7.8	7.8
Brightness(Nits)	1,300/1,500	1,500	1,300	1,500
Refreshment(Hz)	3,840	7,680	3,840	7,680
Grey Scale(Bit)	14	16	14	16
Max Power Consumption(W/SQM)	<500	<560	<500	<570
Ave Power Consumption(W/SQM)	<150	<168	<150	<170
Maintenance Type	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP20	IP20	IP20	IP20
Certificate	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL

Alpha Max Series(Mini 4in1 LED)


RENTAL MINI 4IN1 SOLUTION



Dimension: 500x1,000x80mm
 Pixel Pitch: 2.6mm
 Applications: Touring, indoor stages, exhibitions, TV studios, etc.

Key Features:

- Mini 4in1 LED, 14.2kg impact force per pixel.
- Ultra-lightweight design: 10kg/cabinet.
- High brightness for indoor use: 800~1200 nits.
- Dual network port for stable performance.
- High precision arc angle adjustment: $\pm 6^\circ$.
- Tool-free installation and maintenance.




Mini 4in1 LED


Unique Mini 4in1 LED, can bear 14.2KG impact force per pixel



1/8 low scan rate



7,680Hz high refresh rate



DCI-P3

99.9% DCI-P3

Item Number	FAB-AM2.6	FAB-AM2.6H	FAB-AM2.6H
Pixel Pitch(mm)	2.6	2.6	2.6
Pixel Density(dots/SQM)	147,456	147,456	147,456
LED Type	Mini 4in1	Mini 4in1	Mini 4in1
Module Resolution(pixels)	96*96	96*96	96*96
Module Size(mm)	250*250	250*250	250*250
Cabinet Weight(KG)	10	10	10
Brightness(Nits)	800-1,000	1,000-1,200	1,000-1,200
Scan Ratio	1/32	1/16	1/8
Refreshment(Hz)	3,840	7,680	7,680
Grey Scale(Bit)	14	16	16
Max Power Consumption(W/SQM)	<500	<570	<570
Ave Power Consumption(W/SQM)	<150	<170	<170
Maintenance Type	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP30	IP20	IP20
Certificate	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL

Spider Series(Mini 4in1 LED)


RENTAL MINI 4IN1 SOLUTION

Key Features:


- Unique Mini 4in1 LED, can bear 14.2KG impact force per pixel.
- High contrast ratio to 12,000:1.
- Reduce moire effect during camera shooting.
- High brightness up to 1,500nits.
- High refreshment up to 7,680Hz.
- Ideal solution for XR industry.




Dimension: 500x500x71mm.
 Pixel Pitch: 1.95mm/2.6mm
 Applications: XR studios, TV stations, exhibitions, conferences, etc.




Unique Mini 4in1 LED, can bear 14.2KG impact force per pixel



High brightness up to 1,500nits



High refreshment up to 7,680Hz



High contrast ratio to 12,000:1

Item Number	FAB-SP1.95	FAB-SP1.95H	FAB-SP2.6	FAB-SP2.6H
Pixel Pitch(mm)	1.95	1.95	2.6	2.6
Pixel Density(dots/SQM)	262,144	262,144	147,456	147,456
LED Type	Mini 4in1	Mini 4in1	Mini 4in1	Mini 4in1
Module Resolution(pixels)	128*128	128*128	96*96	96*96
Module Size(mm)	250*250	250*250	250*250	250*250
Cabinet Size(mm)	500*500	500*500	500*500	500*500
Cabinet Weight(KG)	8.2	8.2	8.2	8.2
Brightness(Nits)	1,300	1,500	1,300	1,500
Refreshment(Hz)	3,840	7,680	3,840	7,680
Grey Scale(Bit)	14	16	14	16
Max Power Consumption(W/SQM)	<500	<560	<500	<570
Ave Power Consumption(W/SQM)	<150	<168	<150	<170
Maintenance Type	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP20	IP20	IP20	IP20
Certificate	CE, FCC, PSE, ETL, CB			

Master Series(Mini 4in1 LED)


RENTAL MINI 4IN1 SOLUTION

Key Features:


- Unique Mini 4in1 LED, can bear 14.2KG impact force per pixel.
- High contrast ratio to 12,000:1.
- Reduce moire effect during camera shooting.
- High brightness up to 1,500nits.
- High refreshment up to 7,680Hz.
- Intelligent module.



Dimension: 500x500x73.7mm.
Pixel Pitch: 1.95mm/2.6mm
Applications: XR studios, TV stations, exhibitions, conferences, etc.




Unique Mini 4in1 LED,
can bear 14.2KG impact force per pixel



Intelligent module



Brompton system optional



High refreshment up to 7,680Hz

Item Number	FAB-MS1.95	FAB-MS1.95H	FAB-MS2.6	FAB-MS2.6H
Pixel Pitch(mm)	1.95	1.95	2.6	2.6
Pixel Density(dots/SQM)	262,144	262,144	147,456	147,456
LED Type	Mini 4in1	Mini 4in1	Mini 4in1	Mini 4in1
Module Resolution(pixels)	128*128	128*128	96*96	96*96
Module Size(mm)	250*250	250*250	250*250	250*250
Cabinet Size(mm)	500*500	500*500	500*500	500*500
Cabinet Weight(KG)	8.5	8.5	8.5	8.5
Brightness(Nits)	1,300	1,500	1,300	1,500
Refreshment(Hz)	3,840	7,680	3,840	7,680
Grey Scale(Bit)	14	16	14	16
Max Power Consumption(W/SQM)	<500	<560	<500	<570
Ave Power Consumption(W/SQM)	<150	<168	<150	<170
Maintenance Type	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP20	IP20	IP20	IP20
Certificate	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL

FC Series(Mini 4in1 LED)


RENTAL MINI 4IN1 SOLUTION



Dimension: 500x500x80mm.
 Pixel Pitch: 1.95mm/2.6mm
 Applications: XR studios, TV stations, exhibitions, conferences, etc.

Key Features:

- Minimum diameter 1.27m
- Perfect S shape installation
- Wide range angles for concave and convex.
- 3 steps to achieve the desired curving angle.
- Multiple products can be matched and connected.



Unique Mini 4in1 LED, can bear 14.2KG impact force per pixel



Minimum diameter 1.27m



Perfect S shape installation

Item Number	FAB-FC1.95	FAB-FC1.95H	FAB-FC2.6	FAB-FC2.6H
Pixel Pitch(mm)	1.95	1.95	2.6	2.6
Pixel Density(dots/SQM)	262,144	262,144	147,456	147,456
LED Type	Mini 4in1	Mini 4in1	Mini 4in1	Mini 4in1
Module Resolution(pixels)	256*64	256*64	192*48	192*48
Module Size(mm)	500*125	500*125	500*125	500*125
Cabinet Size(mm)	500*500	500*500	500*500	500*500
Cabinet Weight(KG)	7.8	7.8	7.8	7.8
Brightness(Nits)	1,300	1,500	1,300	1,500
Refreshment(Hz)	3,840	7,680	3,840	7,680
Grey Scale(Bit)	14	16	14	16
Max Power Consumption(W/SQM)	<500	<560	<500	<570
Ave Power Consumption(W/SQM)	<150	<168	<150	<170
Maintenance Type	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP20	IP20	IP20	IP20
Certificate	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL

X Series(Mini 4in1 LED)


RENTAL MINI 4IN1 SOLUTION




Dimension: 500x500x71mm.
 Pixel Pitch: 1.95mm/2.6mm
 Applications: Concerts, events, exhibitions, conferences, Church, TV stations, XR studios, etc.

Key Features:

- Unique Mini 4in1 LED, can bear 14.2KG impact force per pixel.
- Support 90° seamless splicing.
- Four-side bevel switchable at will
- Hanging & Stacking installation.
- Front & Rear maintenance.

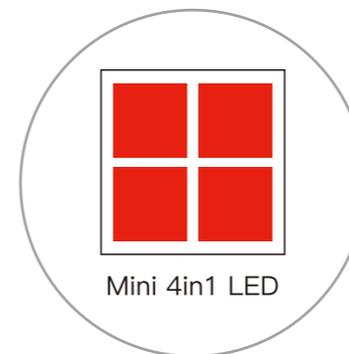


Mini 4in1 LED
 Unique Mini 4in1 LED, can bear 14.2KG impact force per pixel

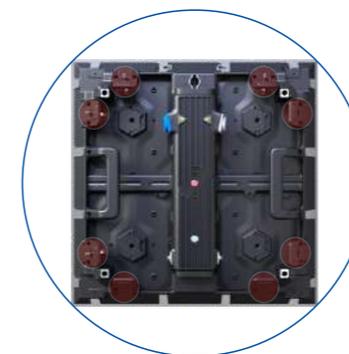

45° side lock accessory



Four-side bevel switchable at will

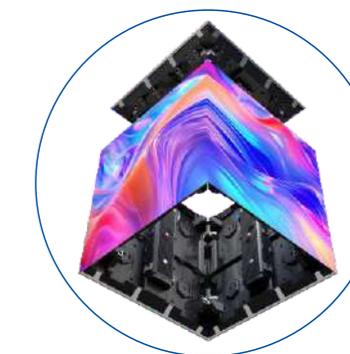


90° Corner

Item Number	FAB-X1.95	FAB-X2.6
Pixel Pitch(mm)	1.95	2.6
Pixel Density(dots/SQM)	262,144	147,456
LED Type	Mini 4in1	Mini 4in1
Module Resolution(pixels)	128*128	96*96
Module Size(mm)	250*250	250*250
Cabinet Size(mm)	500*500	500*500
Cabinet Weight(KG/SQM)	24	24
Brightness(Nits)	1,300	1,300
Refreshment(Hz)	3,840	3,840
Grey Scale(Bit)	14-16	14-16
Max Power Consumption(W/SQM)	550±3%	550±3%
Ave Power Consumption(W/SQM)	168	150
Maintenance Type	Front/Rear	Front/Rear
Ingress Protection	IP20	IP20
Certificate	CE(LVD、EMC)、FCC、PSE、ETL、CB	CE(LVD、EMC)、FCC、PSE、ETL、CB


FC-compatible platform

FC can be spliced with different product Cabinets

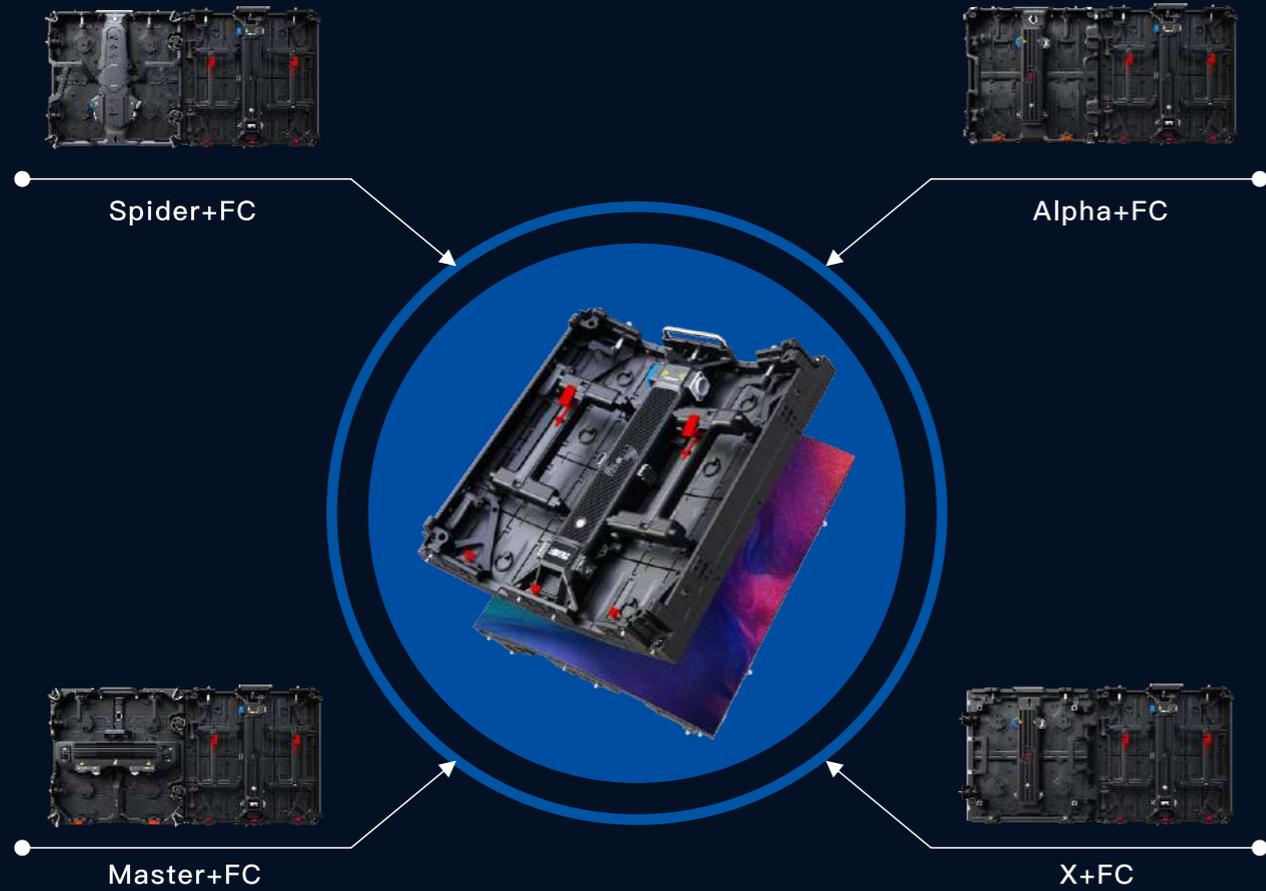

X-compatible platform

X can be spliced with different product Cabinets

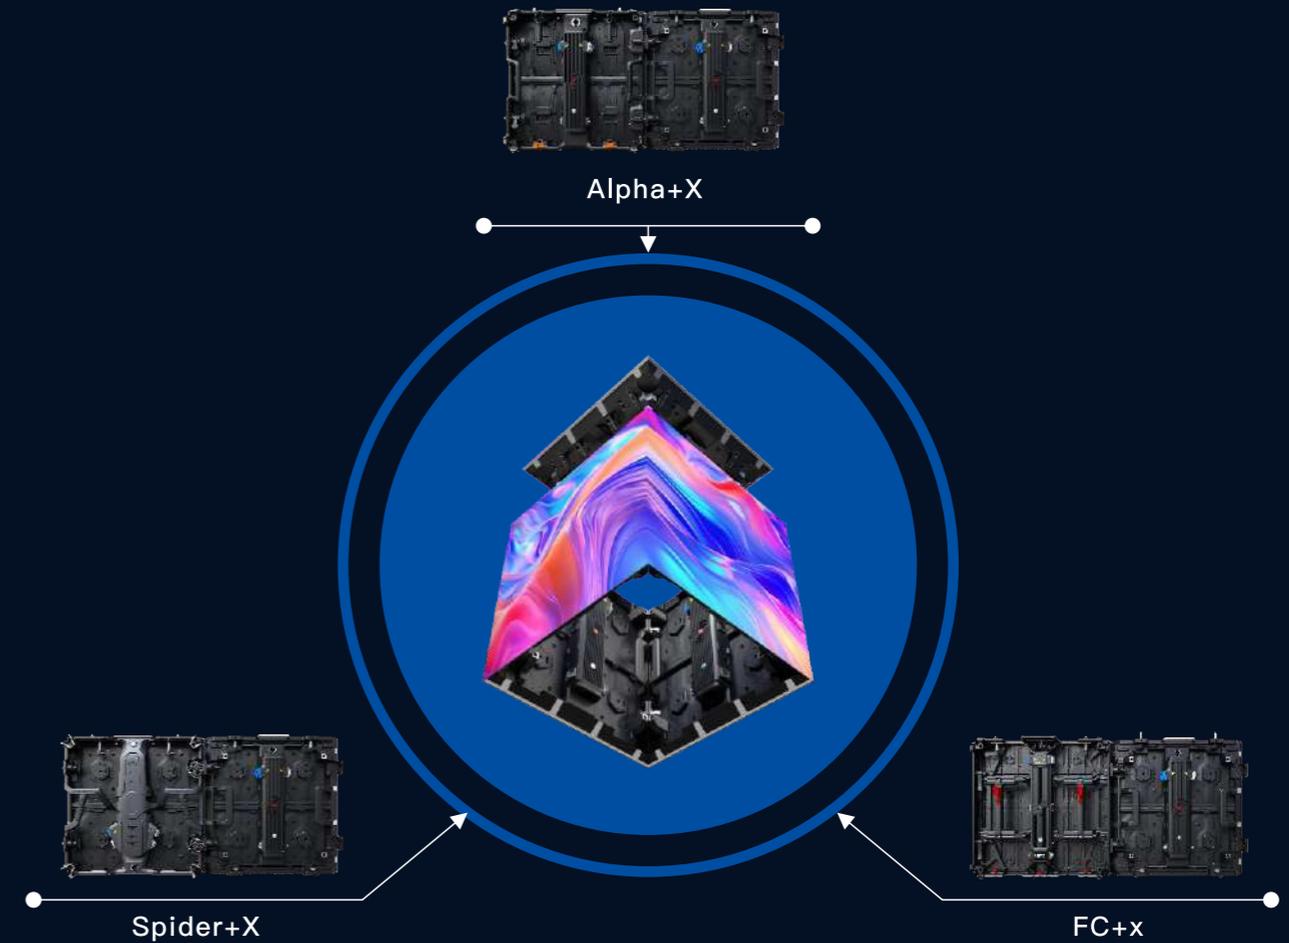

INDOOR RENTAL SOLUTIONS



vinality
World Wine Business

**WORLD
WINE
BUSINESS**
SINCE 1967

Verona, ITALY
2/5 April 2023



- Alpha Series ●
- Alpha Max Series ●
- Spider Series ●
- Spider Max Series ●
- FC Series ●
- X Series ●
- BN Series ●

Alpha Series

INDOOR RENTAL SOLUTION




Dimension: 500x500x80mm
 Pixel Pitch: 12.6mm/2.9mm/3.9mm
 Applications: Stage, conferences, expo, events, concert, etc.

Key Features:


- Higher and stronger contrast.
- Unique arc lock system.
- Front and rear installation & maintenance.
- Ultra high protection for stability.
- Support 90° seamless splicing.




10000:1 high contrast rate



14 bit grey scale



1,000nits high brightness



3,840Hz refresh rate

Item Number	FAB-AP2.6	FAB-AP2.9	FAB-AP3.9
Pixel Pitch(mm)	2.6	2.9	3.9
Pixel Density(dots/SQM)	147,456	112,896	65,536
LED Type	SMD2121	SMD2121	SMD2121
Module Resolution(pixels)	96*96	84*84	64*64
Module Size(mm)	250*250	250*250	250*250
Cabinet Size(mm)	500*500	500*500	500*500
Cabinet Weight(KG)	7.8	7.8	7.8
Brightness(Nits)	800-1,000	800-1,000	800-1,000
Refreshment(Hz)	3,840	3,840	3,840
Grey Scale(Bit)	14	14	14
Max Power Consumption(W/SQM)	<440	<440	<450
Ave Power Consumption(W/SQM)	<135	<135	<135
Maintenance Type	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP30	IP30	IP30
Certificate	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL

Alpha Max Series

INDOOR RENTAL SOLUTION




Dimension: 500x1,000x80mm
Pixel Pitch: 2.9mm/3.9mm
Applications: Touring, indoor stages, exhibitions, TV studios, etc.

Key Features:


- Ultra-lightweight design: 10kg/cabinet.
- High precision arc angle adjustment: $\pm 6^\circ$.
- All-around protection.
- Independent module design.
- Dual network port for stable performance.




Single cabinet only weighs 10kg



14 bit grey scale



1,000nits high brightness



3,840Hz refresh rate

Item Number	FAB-AM2.9	FAB-AM3.9
Pixel Pitch(mm)	2.9	3.9
Pixel Density(dots/SQM)	112,896	65,536
LED Type	SMD2121	SMD2121
Module Resolution(pixels)	84*84	64*64
Module Size(mm)	250*250	250*250
Cabinet Size(mm)	500*1,000	500*1,000
Cabinet Weight(KG)	10	10
Brightness(Nits)	800-1,000	800-1,000
Refreshment(Hz)	3,840	3,840
Grey Scale(Bit)	14	14
Max Power Consumption(W/SQM)	<440	<450
Ave Power Consumption(W/SQM)	<135	<135
Maintenance Type	Front/Rear	Front/Rear
Ingress Protection	IP30	IP30
Certificate	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL

Spider Series



Dimension: 500x500x71mm.
 Pixel Pitch: 1.95mm/2.6mm/2.9mm/3.9mm/4.8mm
 Applications: Concerts, events, exhibitions, conferences, Church, TV stations, XR studios, etc.

INDOOR RENTAL SOLUTION

Key Features:

- Die-casting Aluminum 500x500mm cabinets.
- Universal HUB for all pixel pitch.
- Corner protection.
- Concave & convex lock system.
- Back up Signal connections with fast replacement for power supply.
- Patent design for Rigging&stacking bar, 2in1.



Concave & Convex lock system, very solid and accurate



Clamp to connect cabinet and stacking system, TUV approved



2in1 designed rigging & stacking bar



Professional stacking system

Item Number	FAB-SP1.95	FAB-SP2.6	FAB-SP2.9	FAB-SP3.9	FAB-SP4.8
Pixel Pitch(mm)	1.95	2.6	2.9	3.9	4.8
Pixel Density(dots/SQM)	262,144	147,456	112,896	65,536	43,264
LED Type	SMD1212	SMD2121	SMD2121	SMD2121	SMD2121
Module Resolution(pixels)	128*128	96*96	84*84	64*64	52*52
Module Size(mm)	250*250	250*250	250*250	250*250	250*250
Cabinet Size(mm)	500*500	500*500	500*500	500*500	500*500
Cabinet Weight(KG)	8.2	8.2	8.2	8.2	8.2
Brightness(Nits)	800-1,000	800-1,000	800-1,000	800-1,000	800-1,000
Refreshment(Hz)	3,840	3,840	3,840	3,840	3,840
Grey Scale(Bit)	14	14	14	14	14
Max Power Consumption(W/SQM)	<560	<440	<440	<450	<450
Ave Power Consumption(W/SQM)	<168	<135	<135	<135	<135
Maintenance Type	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP20	IP20	IP20	IP20	IP20
Certificate	CE(LVD, EMC), FCC, PSE, ETL, CB				

Spider Max Series

INDOOR RENTAL SOLUTION

Key Features:


- Die-casting Aluminum 500x1,000mm cabinets.
- Universal HUB for all pixel pitch.
- Corner protection.
- Concave & convex lock system.
- Back up Signal connections with fast replacement for power supply.
- Patent design for Rigging&stacking bar, 2in1.



Dimension: 500x1,000x71mm.
 Pixel Pitch: 2.6mm/2.9mm/3.9mm
 Applications: Concerts, events, exhibitions, conferences, Church, TV stations, XR studios, etc.



Concave & Convex lock system, very solid and accurate

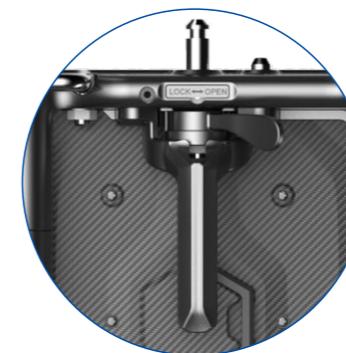

Fast lock system for one man installation



Integrated handle structure



The power box has good thermal conductivity, good heat dissipation effect, and excellent stability and reliability

Item Number	FAB-SP2.6	FAB-SP2.9	FAB-SP3.9
Pixel Pitch(mm)	2.6	2.9	3.9
Pixel Density(dots/SQM)	147,456	112,896	65,536
LED Type	SMD2121	SMD2121	SMD2121
Module Resolution(pixels)	96*96	84*84	64*64
Module Size(mm)	250*250	250*250	250*250
Cabinet Size(mm)	500*1,000	500*1,000	500*1,000
Cabinet Weight(KG)	23kg/m ²	23kg/m ²	23kg/m ²
Brightness(Nits)	1,000	1,000	1,000
Refreshment(Hz)	3,840	3,840	3,840
Grey Scale(Bit)	≥14	≥14	≥14
Max Power Consumption(W/SQM)	420±3%	420±3%	420±3%
Ave Power Consumption(W/SQM)	126	126	126
Maintenance Type	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP20	IP20	IP20
Certificate	CE(EMC, LVD), CB, ETL, 3C	CE(EMC, LVD), CB, ETL, 3C	CE(EMC, LVD), CB, ETL, 3C

FC Series


INDOOR RENTAL SOLUTION

Key Features:

- Minimum diameter 1.27m
- Perfect S shape installation
- Wide range angles for concave and convex.
- 3 steps to achieve the desired curving angle.
- Multiple products can be matched and connected.



Dimension: 500x500x80mm.
 Pixel Pitch: 2.9mm/3.9mm
 Applications: XR studios, TV stations, exhibitions, conferences, etc.



High brightness up to 1,000nits



Minimum diameter 1.27m



Perfect S shape installation

Item Number	FAB-FC2.9	FAB-FC3.9
Pixel Pitch(mm)	2.9	3.9
Pixel Density(dots/SQM)	112,896	65,536
LED Type	SMD2121	SMD2121
Module Resolution(pixels)	168*42	128*32
Module Size(mm)	500*125	500*125
Cabinet Size(mm)	500*500	500*500
Cabinet Weight(KG)	7.8	7.8
Brightness(Nits)	800-1,000	800-1,000
Refreshment(Hz)	3,840	3,840
Grey Scale(Bit)	14	14
Max Power Consumption(W/SQM)	<440	<450
Ave Power Consumption(W/SQM)	<135	<135
Maintenance Type	Front/Rear	Front/Rear
Ingress Protection	IP20	IP20
Certificate	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL

X Series

INDOOR RENTAL SOLUTION

Key Features:


- Modular design.
- Support 90° seamless splicing.
- Four-side bevel switchable at will
- Hanging & Stacking installation.
- Front & Rear maintenance.



Dimension: 500x500x71mm.
 Pixel Pitch: 1.95(Mini)mm/2.6mm(Mini)/2.6mm/2.9mm/3.9mm
 Applications: Concerts, events, exhibitions, conferences, Church, TV stations, XR studios, etc.




Dismountable locking accessories

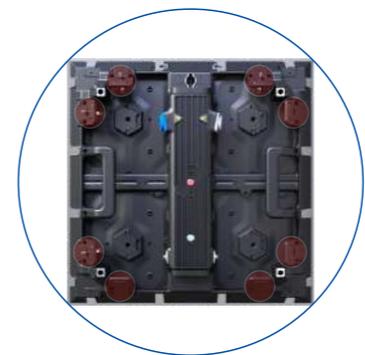

45° side lock accessory



Four-side bevel switchable at will

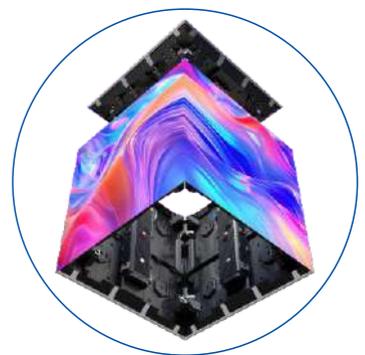

90° Corner

Item Number	FAB-X1.95	FAB-X2.6	FAB-X2.9	FAB-X3.9
Pixel Pitch(mm)	1.95	2.6	2.9	3.9
Pixel Density(dots/SQM)	262,144	147,456	112,896	65,536
LED Type	SMD1212	SMD2121/SMD1515	SMD2121	SMD2121
Module Resolution(pixels)	128*128	96*96	84*84	64*64
Module Size(mm)	250*250	250*250	250*250	250*250
Cabinet Size(mm)	500*500	500*500	500*500	500*500
Cabinet Weight(KG/SQM)	24	24	24	24
Brightness(Nits)	800-1,000	800-1,000	800-1,000	800-1,000
Refreshment(Hz)	3,840	3,840	3,840	3,840
Grey Scale(Bit)	14-16	14-16	14-16	14-16
Max Power Consumption(W/SQM)	550±3%	450±3%	450±3%	450±3%
Ave Power Consumption(W/SQM)	168	135	135	135
Maintenance Type	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP20	IP20	IP20	IP20
Certificate	CE(LVD、EMC)、FCC、PSE、ETL、CB	CE(LVD、EMC)、FCC、PSE、ETL、CB	CE(LVD、EMC)、FCC、PSE、ETL、CB	CE(LVD、EMC)、FCC、PSE、ETL、CB

BN Series

INDOOR RENTAL SOLUTION

Key Features:


- Lightweight design for easy installation.
- Maximum hanging height of 10 meters.
- 2-in-1 hanging and stacking bar system.
- Right-angle/bevel cabinet optional.
- Compatible with VR/FC/X series splicing.



Dimension: 500x500x80mm.
 Pixel Pitch: 2.6(Mini)mm/2.9mm/3.9mm
 Applications: Live events, broadcasting, concerts, touring ,etc.



6.5 kg single cabinet weight

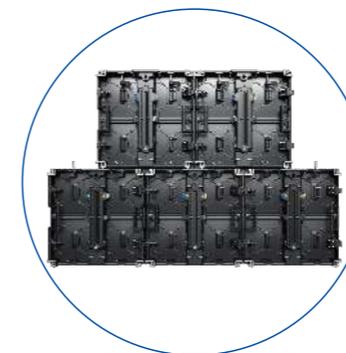

Misaligned splicing



±10° multi-angle sliding locks



Modular design

Item Number	FAB-BN2.6	FAB-BN2.9	FAB-BN3.9
Pixel Pitch(mm)	2.6	2.97	3.9
Pixel Density(dots/SQM)	147,456	112,896	65,536
LED Type	Mini 4in1	SMD2121	SMD2121
Module Resolution(pixels)	96*96	84*84	64*64
Module Size(mm)	250*250	250*250	250*250
Cabinet Size(mm)	500*500	500*500	500*500
Cabinet Weight(KG/SQM)	6.5	6.5	6.5
Brightness(Nits)	800-1,000	800-1,000	800-1,000
Refreshment(Hz)	3,840	3,840	3,840
Grey Scale(Bit)	14	14	14
Max Power Consumption(W/SQM)	550	480	480
Ave Power Consumption(W/SQM)	220	192	192
Maintenance Type	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP20	IP20	IP20
Working Environment	Indoor	Indoor	Indoor

OUTDOOR RENTAL SOLUTIONS

Master Pro Series ●

Galaxy Series ●

Master Plus Series ●

Master Series ●

Alpha Plus Series ●

OFC Series ●

FABULUX LED

Master Pro Series


OUTDOOR RENTAL SOLUTION



Dimension: 500*500*85mm/500*1,000*85mm
 Pixel Pitch: 2.97mm/3.91mm/5.95mm
 Applications: Outdoor 3D display, music festival, transport signage, billboard, etc.

Key Features:


- Full black LED design.
- All-around protection for stability.
- Tool-free installation & maintenance.
- ±10° adjustable sliding curve locks.
- Multi-directional seamless splicing.



7,680Hz high refresh rate



1/7 low scan rate



High brightness 5,000




Effectively eliminates the negative effects of sunlight on the display and dramatically improves display contrast

Item Number	FAB-MP2.9	FAB-MP3.9	FAB-MP5.9
Pixel Pitch(mm)	2.97	3.91	5.95
Pixel Density(dots/SQM)	112,896	65,536	28,224
LED Type	SMD1415(white/Black)	SMD1921(white/Black)	SMD1921(white/Black)
Module Resolution(pixels)	84*168	64*128	42*84
Cabinet Size(mm)	500*500/500*1,000	500*500/500*1,000	500*500/500*1,000
Scan Ratio	1/21	1/16	1/7
Cabinet Weight(KG)	6.5/10.5	6.5/10.5	6.5/10.5
Brightness(Nits)	4,000-4,500/3,000-3,500	4,500-5,000/3,000-3,500	4,500-5,000/3,000-3,500
Refreshment(Hz)	3,840-7,680	3,840-7,680	3,840-7,680
Grey Scale(Bit)	14	14	14
Max Power Consumption(W/SQM)	580±15%/600±15%	600±15%/680±15%	600±15%/680±15%
Ave Power Consumption(W/SQM)	174±15%/180±15%	180±15%/210±15%	180±15%/210±15%
Maintenance Type	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP66	IP66	IP66
Certificate	CE(LVD、EMC)、CB、ETL、FCC	CE(LVD、EMC)、CB、ETL、FCC	CE(LVD、EMC)、CB、ETL、FCC

Galaxy Series


OUTDOOR RENTAL SOLUTION

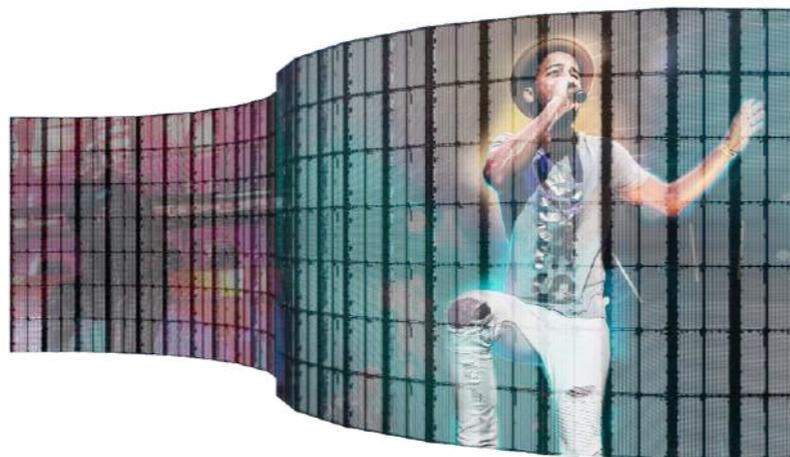


Dimension: 500*500*82mm/500*1,000*82mm
 Pixel Pitch: 3.9 mm to 7.8 mm
 Applications: Corporations events, broadcasting, concerts, touring, etc.

Key Features:


- 50% transparency LED screen.
- One-key switch louvre design.
- IP65 front and rear protection rating.
- Module magnetic and screw design.
- Maximum screen hanging height: 15m.




7,680Hz high refresh rate



One-key switch louvre transparency



High brightness 7,000



Wide viewing angle 160°

Item Number	FAB-P3.9-7.8	FAB-P3.9-7.8
Pixel Pitch(mm)	3.9-7.8	3.9-7.8
Pixel Density(dots/SQM)	32,768	32,768
LED Type	SMD1921/SMD1921H(white)	SMD1921/SMD1921H(white/Black)
Module Resolution(pixels)	128*16	128*16
Module Size(mm)	500*125*14.5	500*125*14.5
Cabinet Size(mm)	500*500/500*1,000	500*500/500*1,000
Cabinet Weight(KG)	5/8	5/8
Brightness(Nits)	5,000-7,000	3,000-4,500
Refreshment(Hz)	7,680	7,680
Grey Scale(Bit)	14	14
Max Power Consumption(W/SQM)	512±15%	512±15%
Ave Power Consumption(W/SQM)	170±15%	170±15%
Maintenance Type	Front/Rear	Front/Rear
Ingress Protection	IP65	IP65
Certificate	CE(LVD, EMC)、CB、ETL、FCC、ROHS	CE(LVD, EMC)、CB、ETL、FCC、ROHS

Master Plus Series


OUTDOOR RENTAL SOLUTION

Key Features:

- Die-casting Aluminum 500x1,000mm cabinet, perfectly matched with Master 500x500mm cabinet.
- High brightness, high refreshment and high contrast for outdoor application.
- Patent top fast lock system for one person's install.
- Accurate side curve lock system.
- Independent control box with PSU and receiving card, for fast replacement.
- 2in1 rigging&stacking bar,with professional stacking system.



Dimension: 500x1,000x74.5mm
 Pixel Pitch: 3.9mm/4.8mm
 Applications: Stage lighting, events, conference, festivals, exhibitions,etc.

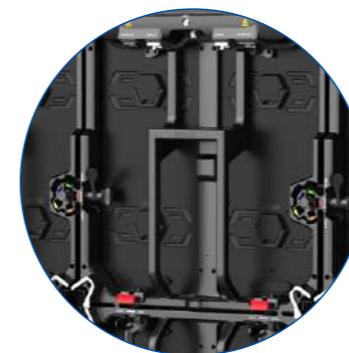

Integrated climbing system



Fast lock system for one man installation



Side lock system for concave and convex



Effectively eliminates the negative effects of sunlight on the display and dramatically improves display contrast.

Item Number	FAB-MP3.9	FAB-MP3.9	FAB-MP4.8	FAB-MP4.8
Pixel Pitch(mm)	3.91	3.91	4.81	4.81
Pixel Density(dots/SQM)	65,536	65,536	43,264	43,264
LED Type	SMD1921	SMD1921(black)	SMD1921	SMD1921(black)
Module Resolution(pixels)	64*128	64*128	52*104	52*104
Module Size(mm)	250*500	250*500	250*500	250*500
Cabinet Size(mm)	500*1,000	500*1,000	500*1,000	500*1,000
Cabinet Weight(KG)	12.5	12.2	12.5	12.2
Brightness(Nits)	4,500-6,000	3,000/3,500	4,500-6,000	3,000/3,500
Refreshment(Hz)	3,840	3,840/7,680	3,840	3,840/7,680
Grey Scale(Bit)	14	14/16	14	14/16
Max Power Consumption(W/SQM)	<700	<680/<750	<700	<680/<750
Ave Power Consumption(W/SQM)	<210	<200/<220	<210	<200/<220
Maintenance Type	Rear	Rear	Rear	Rear
Ingress Protection	IP65	IP65	IP65	IP65
Certificate	CE(LVD、EMC)、ETL	CE(LVD、EMC)、ETL	CE(LVD、EMC)、ETL	CE(LVD、EMC)、ETL

Master Series

OUTDOOR RENTAL SOLUTION

Key Features:


- Platform designed for both outdoor applications.
- Universal HUB for all indoor & outdoor pixel pitch.
- Patent top fast lock system for one person's install.
- Accurate side curve lock system.
- Independent control box with PSU and receiving card, for fast replacement.
- 2in1 rigging&stacking bar, with professional stacking system.




Dimension: 500x500x74.5mm

Pixel pitch outdoor: 2.9mm/3.9mm/4.8mm


Application: Concerts, events, exhibitions, conferences, Church, TV stations, XR studios, etc.




High brightness up to 5,000nits



14 bit High gray scale



High refreshment up to 3,840Hz



High contrast ratio to 8,000:1

Item Number	FAB-MSO2.9	FAB-MSO3.9	FAB-MSO4.8
Pixel Pitch(mm)	2.9	3.9	4.8
Pixel Density(dots/SQM)	112,896	65,536	43,264
LED Type	SMD1515	SMD1921	SMD1921
Module Resolution(pixels)	84*84	64*64	52*52
Module Size(mm)	250*250	250*250	250*250
Cabinet Size(mm)	500*500	500*500	500*500
Cabinet Weight(KG)	9.1	9.1	9.1
Brightness(Nits)	4,000	4,500-5,000	4,500-5,000
Refreshment(Hz)	3,840	3,840	3,840
Grey Scale(Bit)	14	14	14
Max Power Consumption(W/SQM)	<750	<700	<700
Ave Power Consumption(W/SQM)	<225	<210	<210
Maintenance Type	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP65	IP65	IP65
Certificate	CE(LVD、EMC)、FCC、PSE、ETL	CE(LVD、EMC)、FCC、PSE、ETL	CE(LVD、EMC)、FCC、PSE、ETL

Alpha Plus Series



reddot design award



Dimension: 576x576x76.8mm


Pixel Pitch: 3.84mm

Applications: Concerts, events, exhibitions, conferences, Church, TV stations, XR studios, etc.

OUTDOOR RENTAL SOLUTION

Key Features:


- Red Dot Awarded product.
- Die-casting Aluminum 576x576mm cabinet.
- Universal HUB design for all indoor and outdoor modules.
- Patent top fast lock system for one person's install.
- Accurate side curve lock system, concave and convex easily.
- Independent control box with PSU and receiving card, for fast replacement.

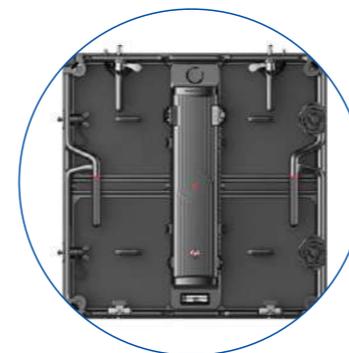


Unique design with 576x576mm cabinet.



Patent top fast lock system for one person's install.

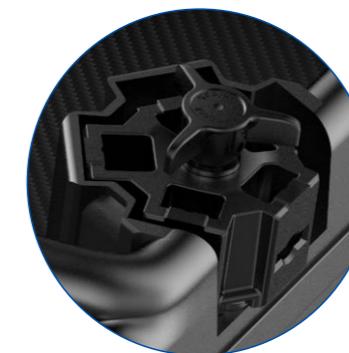

Accurate side curve lock system, concave and convex easily.

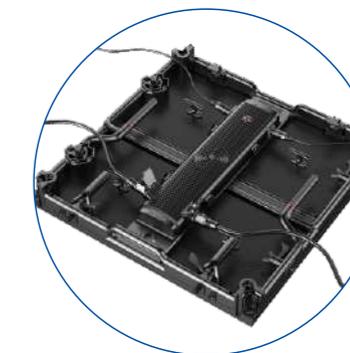

Ergonomic handle design, easy to install.

Item Number	FAB-APO3.84
Pixel Pitch(mm)	3.84
Pixel Density(dots/SQM)	67,816
LED Type	SMD1921
Module Resolution(pixels)	75*75
Module Size(mm)	288*288
Cabinet Size(mm)	576*576
Cabinet Weight(KG)	9.3
Brightness(Nits)	4,500
Refreshment(Hz)	3,840
Grey Scale(Bit)	14
Max Power Consumption(W/SQM)	660
Ave Power Consumption(W/SQM)	260
Maintenance Type	Rear
Ingress Protection	IP65

OFC Series


ONE AND ONLY
OUTDOOR FLEXIBLE
RENTAL SOLUTION

Key Features:


- Equipped with a multi-functional handle to support $\pm 45^\circ$ folding.
- Support multi-angle creative installation.
- Cabinets to achieve the perfect “S” shape.
- Compatible Splicing Solution.
- Reduce moire effect during camera shooting.



Dimension: 500x500x106.8mm.
Pixel Pitch: 3.9mm
Applications: XR studios, TV stations, exhibitions, conferences, etc.



High brightness up to 5,000nits



Minimum diameter 1.27m



Perfect S shape installation

Item Number	FAB-0FC3.9
Pixel Pitch(mm)	3.9
Pixel Density(dots/SQM)	65,536
LED Type	SMD1921
Module Resolution(pixels)	128*128
Module Size(mm)	500*500
Cabinet Size(mm)	500*500
Cabinet Weight(KG)	8
Brightness(Nits)	4,800-5,000
Refreshment(Hz)	3,840
Grey Scale(Bit)	≥ 14
Max Power Consumption(W/SQM)	> 750
Ave Power Consumption(W/SQM)	225
Maintenance Type	Rear
Ingress Protection	IP65
Certificate	CE, FCC, ETL, EMC

RENTAL VR Series

ORIGINALITY RENTAL SOLUTION



Indoor

1.9(Mini)mm/2.6(Mini)mm/2.9mm, 250x500mm


3.9mm, 125x500mm

VR+Spider/VR+Spider Max/VR+Master/VR+Alpha/VR+Alpha Max/VR+BN/VR+FC/VR+X

Perfect round corner for 3D effect solution

RENTAL VR Series

ORIGINALITY RENTAL SOLUTION

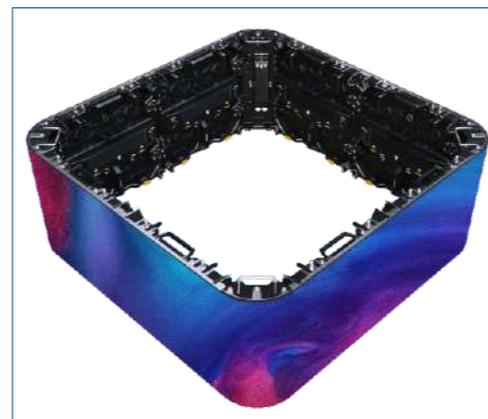



Outdoor

3.9mm/4.8mm, 250x500mm

VR+Master/VR+Master Pro/VR+Master Plus/VR+OFC

Perfect round corner for 3D effect solution

Cases

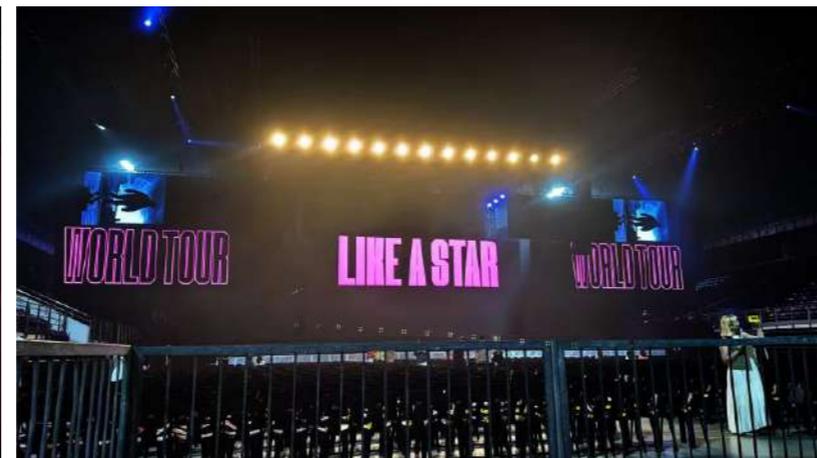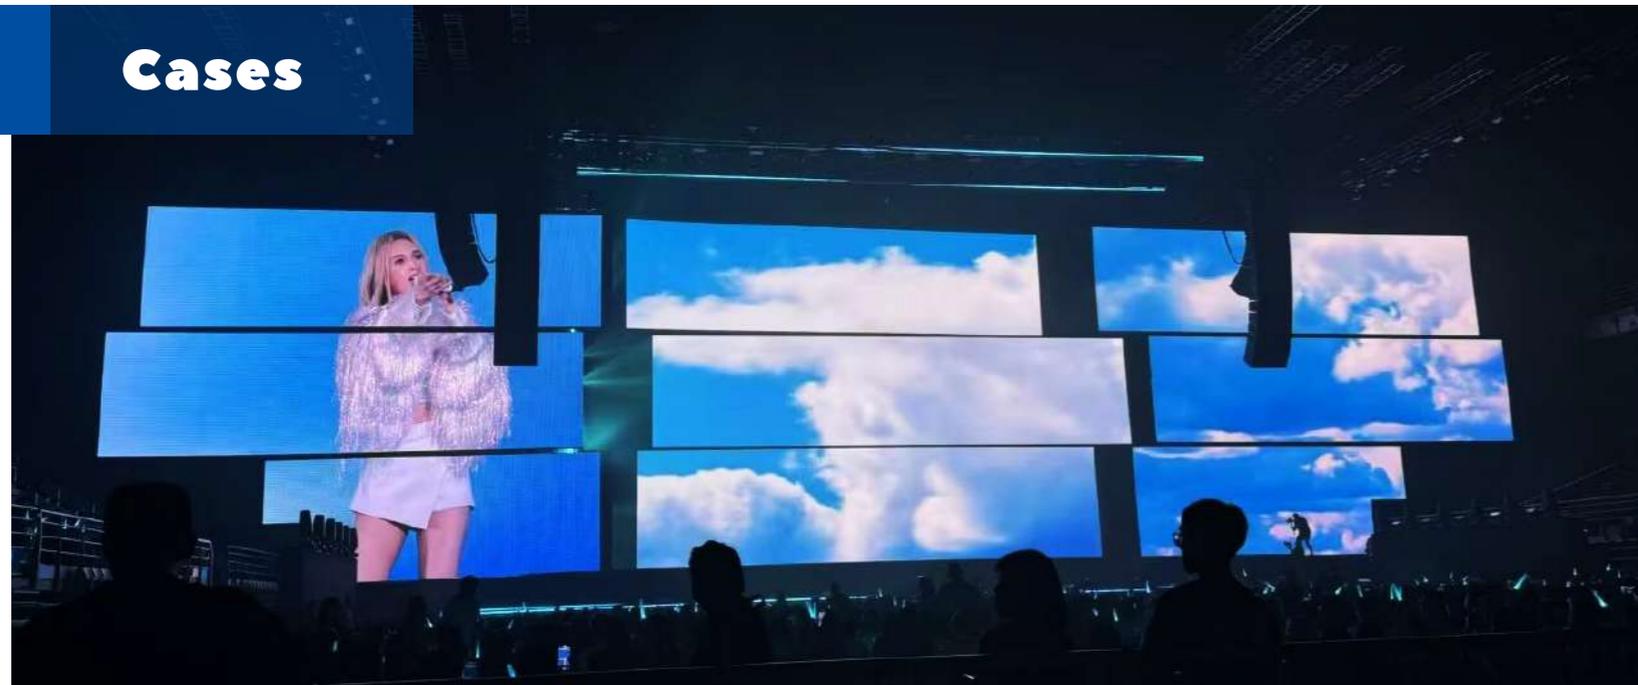

Spider plus 3.9 for Rainie Yang Malaysia Concert

Cases



Master Plus Black 3.9 in Russia



Spider Mini 2.6 in Germany



Spider MINI2.6

Cases



Master Plus 3.9 in Vietnam

Cases



Spider 2.6mm for French Elections 2022

Cases



Spider 2.9 Thailand



Cases



Spider 3.9mm for Vinhomes Ocean Park, Vietnam



Our Indian Address:

KY Arcade, Metro Pillar No. 325,
South Kalamassery Cochin-682033,
Kerala, India

Email: nexisled@gmail.com

Email: info@nexisled.com

Email: sales@nexisled.com

Mob: +91 9446 22 1588

Mob: +91 907237 1588



Our UAE Address:

First Emirates Computers & Technical Services
Po Box: 38575, Musaffah 9
Abu Dhabi - United Arab Emirates

Email: Sales@firstemirates.com

Email: Info@nexisled.com

Email: sales@nexisled.com

Mob: +971 55 311 2074

Mob: +91 907237 1588



Our KUWAIT Address:

Nahar Al Hajiri Complex
Floor 1, Office No. li, Block 8
Road 28, Fahaheel - Kuwait

Email: Info@nexis.com

Email: Sales@nexisled.com

Email: nexisled@gmail.com

Mob: + 965 552 37362

Mob: +91 9072371588