



MAKING FABULOUS PRODUCTS



[www.nexisled.com](http://www.nexisled.com)



**OUTDOOR SOLUTIONS**

Quality Control Process

**20+**

Professional QC Equipment

**60+**

International standard


**ISO9001**



Testing laboratory



High temperature test 80 °C

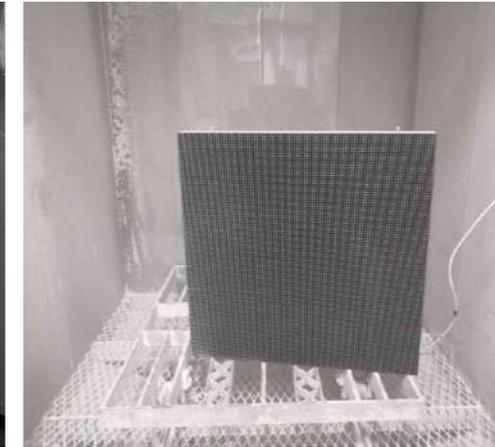

Low temperature test minus 40 °C



Ultraviolet test



IP66 Waterproof Test



5VB Fireproof Test



Aging Test

Qualification Certificates **130+**

**Heat dissipation technology**  
Die-casting Aluminum module for fast heat dissipation

**Energy saving technology**  
>30% power consumption saved

**Fire prevention technology**  
The highest fireproof to 5VB


**High contrast**  
High contrast to 10,000:1

**Waterproof technology**  
Ip66 front & Rear waterproof level


**Brightness storage technology**  
High brightness to 10,000nits and adjustable

# Core Technology

## OUTDOOR SOLUTIONS

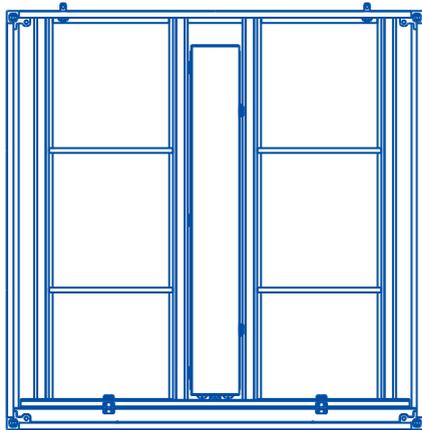

## FABULUX ALUMINUM CABINET

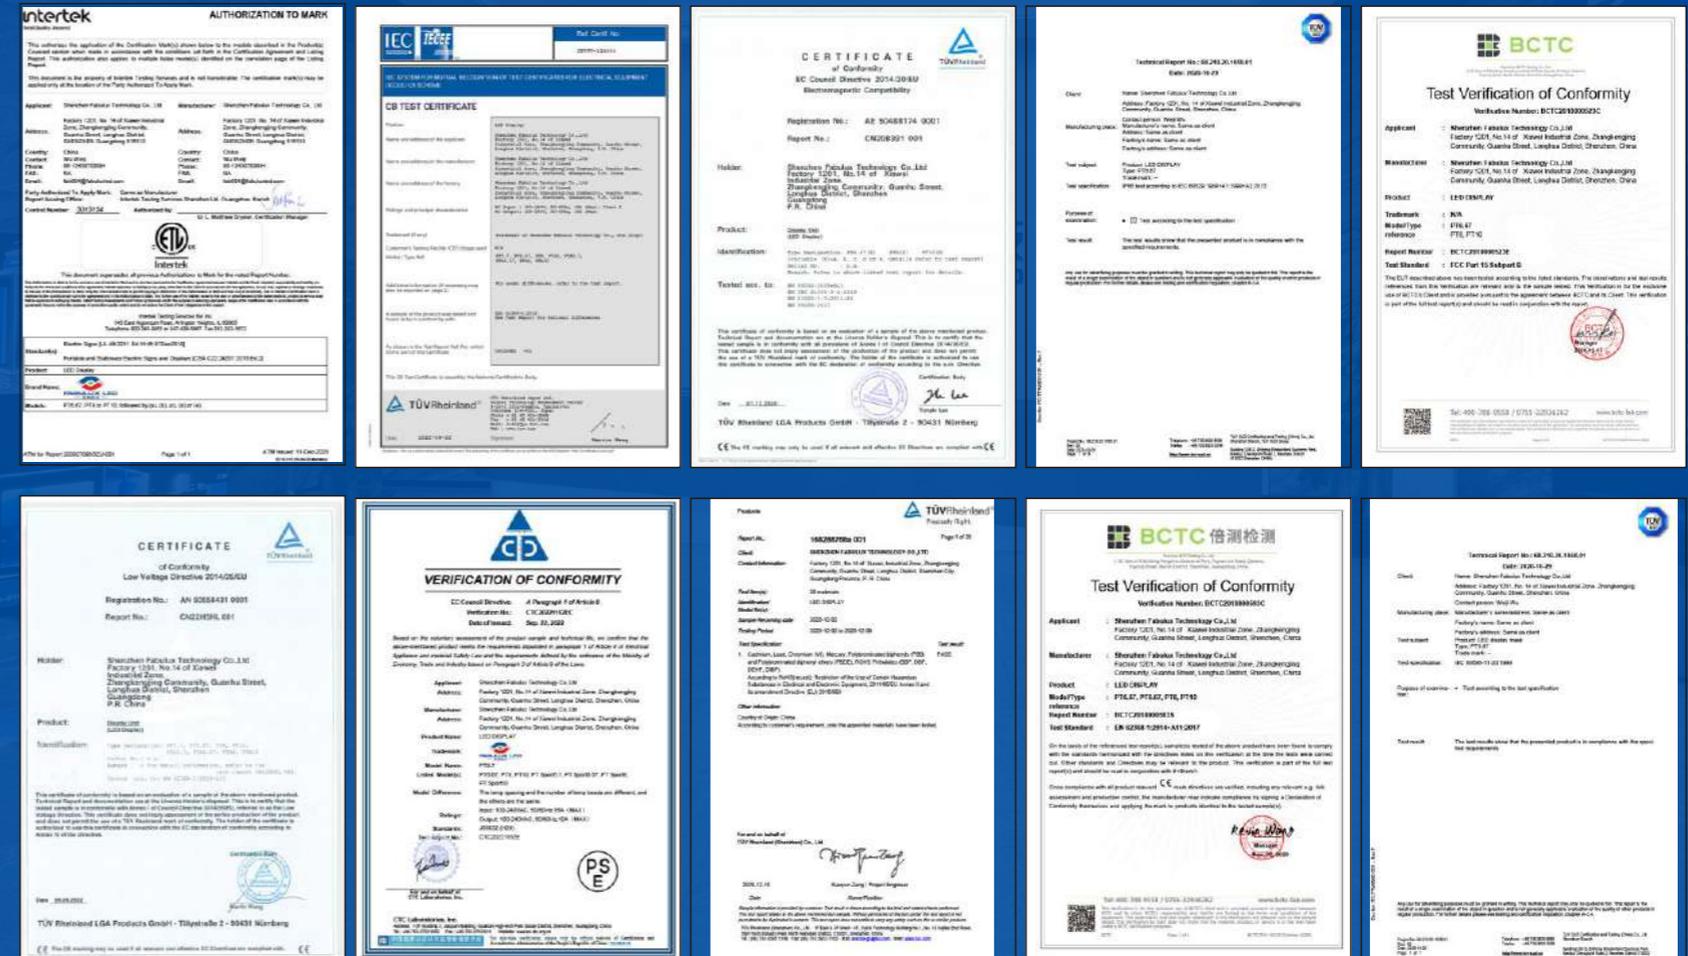

# Platinum Series


## OUTDOOR SOLUTIONS

### Key Features:

- Die-casting Aluminum module for fast heat dissipation.
- IP66 waterproof and 5VB fireproof.
- Common cathode technology for energy saving.
- High brightness option for 10,000nits.
- Totally front and rear service.
- Stable and reliable performance.




Standard Dimension: 960x960x90mm  
 Optional Dimensions: 960x640mm/960x1,280mm/1,440x960mm/  
 1,440x640mm  
 Pixel pitch: 5.71mm, 6.67mm, 8mm, 10mm  
 Applications: Digital signage, billboard, road sign, stadium scoreboards,  
 building facade, etc.

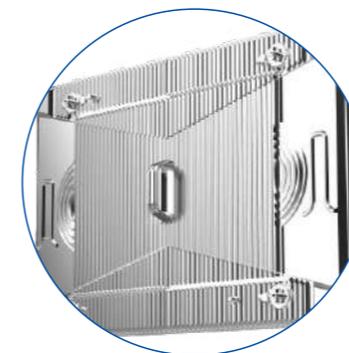

Die-casting Aluminum Module for fast heat dissipation



Hidden cable cover, protect the power cable and signal cable from damages.

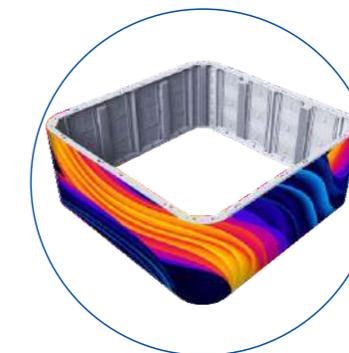

Perfect seamless corner cabinet for naked-eye 3D solution.



Die-casting connecting plate, for wall-mount installation directly.

Item Number	FAB-PT5.7	FAB-PT6.6	FAB-PT8	FAB-PT10
Pixel Pitch(mm)	5.71	6.67	8	10
Pixel Density(dots/SQM)	30,625	22,500	15,625	10,000
LED Type	SMD2727	SMD2727	SMD2727/SMD3535	SMD2727/SMD3535
Module Resolution(pixels)	84*56	72*48	60*40	48*32
Module Size(mm)	480*320	480*320	480*320	480*320
Cabinet Size(mm)	960*1280/1440*960/960*960/1440*640/960*640			
Cabinet Weight(KG/SQM)	30	30	30	30
Brightness(Nits)	6,000-9,000	6,000-10,000	6,000-10,000	6,000-10,000
Refreshment(Hz)	3,840	3,840	3,840	3,840
Grey Scale(Bit)	14-16	14-16	14-16	14-16
Max Power Consumption(W/SQM)	580±5%	580±5%	580±5%	580±5%
Ave Power Consumption(W/SQM)	174	174	174	174
Maintenance Type	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP66/IP66	IP66/IP66	IP66/IP66	IP66/IP66
Certificate	CE(LVD, EMC), ETL, 3C, CB, FCC, PSE, RoHS, UL			

# PTF Series


## OUTDOOR SOLUTIONS



Standard Dimension: 1,000x1,000x81.5mm  
 Pixel pitch: 3.9mm, 4.8mm, 5.9mm, 6.2mm, 8.3mm, 10.4mm  
 Applications: Digital signage, billboard, road sign, stadium scoreboards, building facade, etc.

### Key Features:

- CCES energy saving technology.
- 13000:1 high contrast ratio.
- High brightness option for 9,000nits.
- IP66 waterproof and 5VB fireproof.
- Self-contained heat dissipation, no need to install other heat dissipation equipment.
- Totally front and rear service.

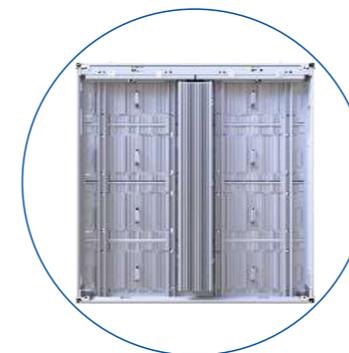


Die-casting Aluminum module and cabinet, for seamless installation and fast heat radiation.



Cabinet Thickness 81.5mm  
Lightweight Cabinet 27kg/m<sup>2</sup>



Perfect seamless corner cabinet for naked-eye 3D solution.

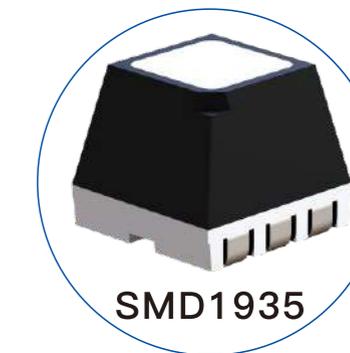

Higher brightness/Higher contrast/  
Energy-saving

Item Number	FAB-PTF3.9	FAB-PTF4.8	FAB-PTF5.9	FAB-PTF6.2	FAB-PTF8.3	FAB-PTF10.4
Pixel Pitch(mm)	3.91	4.81	5.95	6.25	8.33	10.41
Pixel Density(dots/SQM)	65,536	43,264	28,224	25,600	14,400	9,216
LED Type	SMD1921/SMD1935	SMD1935	SMD1921	SMD2727	SMD2727	SMD2727
Module Resolution(pixels)	128*64	104*52	84*42	80*40	60*30	48*24
Module Size(mm)	500*250	500*250	500*250	500*250	500*250	500*250
Cabinet Size(mm)	1,000*500/1,000*750/1,000*1000/1,500*1000/1,500*750/1,500*500					
Cabinet Weight(KG/SQM)	27					
Brightness(Nits)	5,000-7,000/6,000-8,000	6,000-8,000	5,000-7,000	6,000-9,000		
Refreshment(Hz)	3,840/7,680	7,680	3,840	3,840		
Grey Scale(Bit)	14-16	14-16	14-16	14-16		
Max Power Consumption(W/SQM)	580±5%/650±5%	650±5%	540±5%	550±5%	550±5%	550±5%
Ave Power Consumption(W/SQM)	174/195	195	162	165	165	165
Maintenance Type	Front/Rear					
Ingress Protection	IP66/IP66					
Certificate	CE(LVD、EMC)、CB、FCC、ETL					

# Platinum PRO Series


## OUTDOOR SOLUTIONS

### Key Features:


- 400x300mm Aluminum module design for 16:9 Golden Ratio.
- IP66 waterproof and 5VB fireproof.
- Support Power and signal back up.
- Common cathode technology for energy-saving.
- High brightness option to 10,000nits.
- High quality components for 3 years to 5 years warranty.



Dimension: 800x1,200x86mm  
 Optional Dimensions: 800x600mm/800x900mm/800x1,200mm/1,200x600mm  
 /1,200x900mm/1,200x1,200mm/1,600x900mm  
 Pixel Pitch: 6.67mm, 8.3mm, 10mm  
 Applications: DOOH Market, Billboard Advertisement, Road Sign, Stadiums, etc.

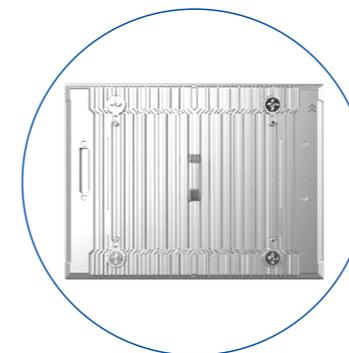

400x300mm Die-casting Aluminum module, for fast heat dissipation

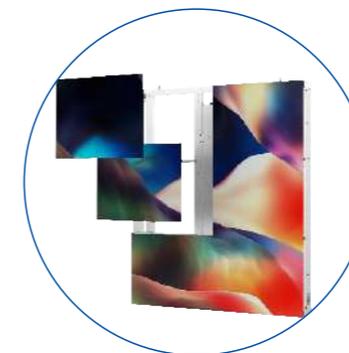

Hard connection design with total front and rear service.



hidden cable cover, protect the power cable and signal cable from damages.



Die-casting connecting plate, for wall-mount installation directly.

Item Number	FAB-PTP6.67	FAB-PTP8	FAB-PTP10
Pixel Pitch(mm)	6.67	8.3	10
Pixel Density(dots/SQM)	22,500	14,400	10,000
LED Type	SMD2727	SMD2727	SMD3535
Module Resolution(pixels)	60*45	48*36	40*30
Module Size(mm)	400*300	400*300	400*300
Cabinet Size(mm)	800*600/800*900/800*1,200/1,200*600/1,200*900/1,200*1,200/1,600*900		
Cabinet Weight(KG/SQM)	30	30	30
Brightness(Nits)	6,000-9,000	6,000-10,000	6,000-10,000
Refreshment(Hz)	3,840	3,840	3,840
Grey Scale(Bit)	14-16	14-16	14-16
Max Power Consumption(W/SQM)	580±5%	550±5%	550±5%
Ave Power Consumption(W/SQM)	174	165	165
Maintenance Type	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP66/IP66	IP66/IP66	IP66/IP66
Certificate	CE(LVD, EMC), ETL, FCC, RoHS		

# Platinum320 Series


## OUTDOOR SOLUTIONS

### Key Features:

- Die-casting Aluminum module for fast heat dissipation.
- IP66 waterproof and 5VB fireproof.
- Common cathode technology for energy saving.
- High brightness option for 10,000nits.
- Totally front and rear service.
- Stable and reliable performance.




Standard Dimension: 1,280x960x90mm  
 Optional Dimensions: 1,280x960mm/1,280x1,280mm/960x960mm/960x1,280mm  
 Pixel pitch: 6.67mm, 8mm, 10mm  
 Applications: Digital signage, billboard, road sign, stadium scoreboards, building facade, etc.

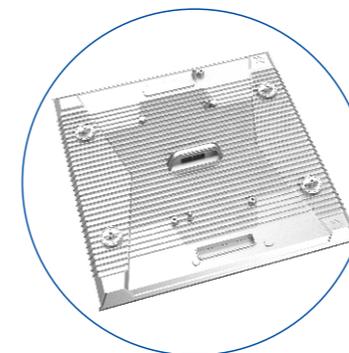

Die-casting Aluminum Module for fast heat dissipation



Hidden cable cover, protect the power cable and signal cable from damages.

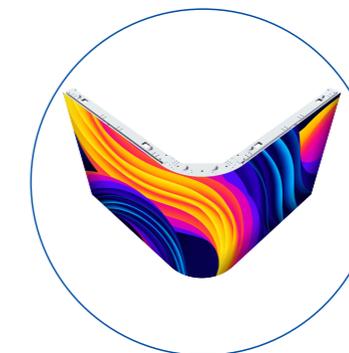

Perfect seamless corner cabinet for naked-eye 3D solution.



Die-casting connecting plate, for wall-mount installation directly.

Item Number	FAB-PT320 5.7	FAB-PT320 6.67	FAB-PT320 8	FAB-PT320 10
Pixel Pitch(mm)	5.71	6.67	8	10
Pixel Density(dots/SQM)	30,625	22,500	15,625	10,000
LED Type	SMD2727	SMD2727	SMD3535	SMD3535
Module Resolution(pixels)	56*56	48*48	40*40	32*32
Module Size(mm)	320*320	320*320	320*320	320*320
Cabinet Size(mm)	1280*960	1280*960	1280*960	1280*960
Cabinet Weight(KG)	30	30	30	30
Brightness(Nits)	6,000-9,000	6,000-9,000	6,000-10,000	6,000-10,000
Refreshment(Hz)	3,840	3,840	3,840	3,840
Grey Scale(Bit)	14-16	14-16	14-16	14-16
Max Power Consumption(W/SQM)	580±5%	580±5%	580±5%	580±5%
Ave Power Consumption(W/SQM)	174	174	174	174
Maintenance Type	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP66/IP66	IP66/IP66	IP66/IP66	IP66/IP66
Certificate	CE, FCC, ETL, EMC, ROHS			

# Platinum S series

## OUTDOOR SOLUTIONS

### Key Features:


- Fine pixel pitch for outdoor fixed installation.
- Die-casting Aluminum module for fast heat dissipation.
- IP66 waterproof and 5VB fireproof.
- Easy service from front and rear side.
- High brightness option to 9,000nits.
- Stable performance for outdoor environment.




Standard Dimension: 500x1,000x81mm  
 Optional Dimensions: 500x500mm/500x750mm/500x1,000mm  
 Pixel Pitch Outdoor: 2.9mm, 3.9mm, 4.8mm, 6.25mm  
 Applications: Window Screen, Digital Signage System, Bus Station,  
 Arena Display, Business Advertising Signs, Airport, etc.



Flexible cabinet size

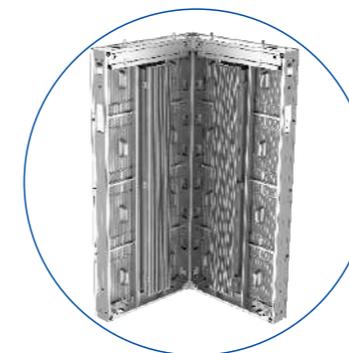

Cabinet with side cut 45degree, installed into 90 degree corner.

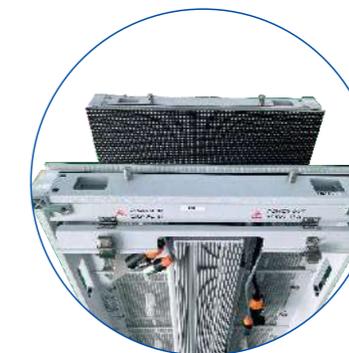

Cables hidden on top of cabinet, for safety and long lifespan.



Perfect seamless corner cabinet for naked-eye 3D solution.

Item Number	FAB-PTS2.9	FAB-PTS2.9	FAB-PTS3.9	FAB-PTS3.9	FAB-PTS4.8	FAB-PTS6.2
Pixel Pitch(mm)	2.9	2.9	3.9	3.9	4.8	6.2
Pixel Density(dots/SQM)	112,896	112,896	65,536	65,536	43,264	25,600
LED Type	SMD1515 (white led)	SMD1515 (black led)	SMD1935	SMD1921 (white led)	SMD1921 (white led)	SMD2727 (white led)
Module Resolution(pixels)	84*84	84*84	128*64	128*64	104*52	80*40
Module Size(mm)	250*250	250*250	500*250	500*250	500*250	500*250
Cabinet Size(mm)	500*500/500*750/500*1000					
Cabinet Weight(KG/SQM)	38		36.5			
Brightness(Nits)	4,500-5,000	2,500-3,000	6,000-8,000	5,000-7,000		6,000-9,000
Refreshment(Hz)	3,840					
Grey Scale(Bit)	14-16					
Max Power Consumption(W/SQM)	670±5%	500±5%	650±5%	570±5%	540±5%	550±5%
Ave Power Consumption(W/SQM)	201	150	228	171	162	165
Maintenance Type	Front/Rear					
Ingress Protection	IP66/IP66					
Certificate	CE(LVD、EMC)、CB、FCC、ETL					

# PTA series


## OUTDOOR SOLUTIONS




Standard Dimension: 960x960x74mm  
 Pixel Pitch Outdoor: 6.67mm, 8mm, 10mm  
 Applications: Outdoor 3D display, music festival, transport signage, billboard, etc.

### Key Features:

- Low voltage energy saving, reduced operating costs.
- Efficient heat dissipation structure & material.
- Suitable for outdoor unenclosed installation.
- IP66 ultra-high protection rating.
- Single cabinet weight: only 28kg.

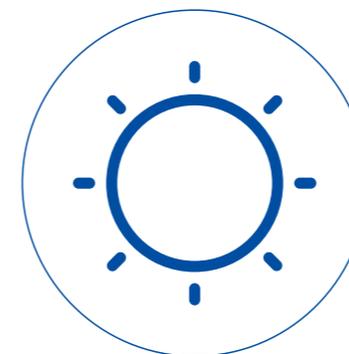


8,000 nits high brightness

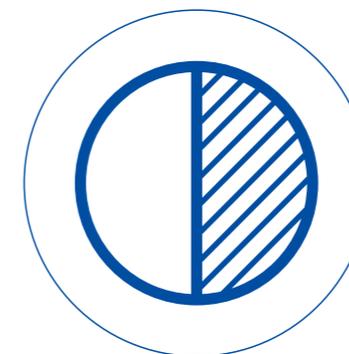

13,000: 1 high contrast rate



3,840Hz high refresh rate

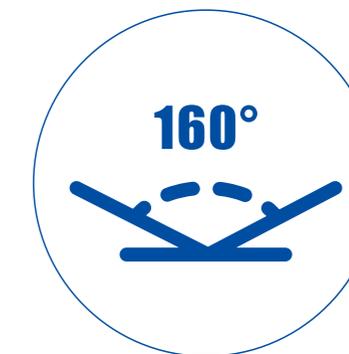

160° wide viewing angle

Item Number	FAB-PTA6.6	FAB-PTA6.6H	FAB-PTA8	FAB-PTA8H	FAB-PTA10	FAB-PTA10H
Pixel Pitch(mm)	6.67	6.67	8	8	10	10
Pixel Density(dots/SQM)	22,500	22,500	15,625	15,625	10,000	10,000
LED Type	SMD2727	SMD2727	SMD3535	SMD2727	SMD3535	SMD2727
Module Resolution(pixels)	72*48	72*48	60*40	60*40	48*32	48*32
Module Size(mm)	480*320	480*320	480*320	480*320	480*320	480*320
Cabinet Size(mm)	960*640/960*960/960*1,280/1,440*640/1,440*960					
Cabinet Weight(KG/SQM)	33	33	33	33	33	33
Brightness(Nits)	5,500-6,500	8,000	5,500-6,500	8,000	5,500-6,500	8,000
Refreshment(Hz)	3,840	3,840	3,840	3,840	3,840	3,840
Grey Scale(Bit)	14-16	14-16	14-16	14-16	14-16	14-16
Max Power Consumption(W/SQM)	580±5%	580±5%	580±5%	580±5%	580±5%	580±5%
Ave Power Consumption(W/SQM)	174	174	174	174	174	174
Maintenance Type	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP66/IP66	IP66/IP66	IP66/IP66	IP66/IP66	IP66/IP66	IP66/IP66
Working Environment	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor

# Diamond Series

## OUTDOOR SOLUTIONS

### Key Features:

- Special design for outdoor high resolution screen.
- Die-casting Aluminum module and cabinet for high precision.
- Fully outdoor installation with IP66 and 5VB fireproof.
- Totally front service and rear service.
- High brightness to 5,000nits.
- Ideal solution for outdoor high-end applications.




Dimension: 500x500x66mm  
 Pixel Pitch: 1.9mm/2.6mm/2.9mm  
 Applications: Chain stores, Bus station, restaurants, Museum, Showrooms, etc.



Die-casting Aluminum cabinet, for high precise installation.



Cables hidden on top of cabinet, for safety and long lifespan.

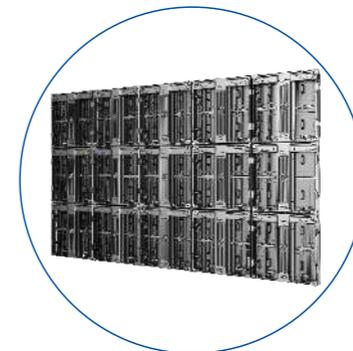

Various installation type like Rigging, stacking, wall-mounted, etc.



Hard connection design, total front and rear service.

Item Number	FAB-DM1.9	FAB-DM2.6	FAB-DM2.9
Pixel Pitch(mm)	1.95	2.6	2.97
Pixel Density(dots/SQM)	262,144	147,456	112,896
LED Type	SMD1212	SMD1212	SMD1515
Module Resolution(pixels)	128*128	96*96	84*84
Module Size(mm)	250*250	250*250	250*250
Cabinet Size(mm)	500*500	500*500	500*500
Cabinet Weight(KG)	9	8.5	8.5
Brightness(Nits)	3,500-4,500	3,500-4,500	4,500-5,000
Refreshment(Hz)	3,840	3,840	3,840
Grey Scale(Bit)	14-16	14-16	14-16
Max Power Consumption(W/SQM)	600±5%	600±5%	600±5%
Ave Power Consumption(W/SQM)	210	210	210
Maintenance Type	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP66/IP66	IP66/IP66	IP66/IP66
Certificate	CE, FCC, ETL, EMC, PSE	CE, FCC, ETL, EMC, PSE	CE, FCC, ETL, EMC, PSE

# Platinum Sports

## SPORTS SOLUTION

### Key Features:

- Platinum 960x960mm cabinets with Aluminum modules.
- Top rubber cover, soft mask for protection.
- Rotatable base, easy for installation.
- Side lock system.
- High refreshment for live broadcast.
- Cable-free back side, total front & rear service.



Dimension: 960x960x95mm  
 Pixel Pitch: 8mm/10mm  
 Applications: All kinds of stadiums.



Soft mask for protection players.



Top rubber cover, stable and ultraviolet-proof.



Rotatable base, easy for installation.



Side lock and side handle.

Item Number	FAB-PSP8	FAB-PSP10
Pixel Pitch(mm)	8	10
Pixel Density(dots/SQM)	15,625	10,000
LED Type	SMD3535	SMD3535
Module Resolution(pixels)	60*40	48*32
Module Size(mm)	480*320	480*320
Cabinet Size(mm)	960*960	960*960
Cabinet Weight(KG)	31	31
Brightness(Nits)	6,000	6,000
Refreshment(Hz)	3,840	3,840
Grey Scale(Bit)	14-16	14-16
Max Power Consumption(W/SQM)	550±5%	550±5%
Ave Power Consumption(W/SQM)	165	165
Maintenance Type	Front/Rear	Front/Rear
Ingress Protection	IP66/IP66	IP66/IP66
Certificate	CE(LVD、EMC)、ETL、3C、CB、FCC、PSE、RoHS	CE(LVD、EMC)、ETL、3C、CB、FCC、PSE、RoHS

# Platinum Pro sports


## SPORTS SOLUTION



Dimension: 1,600x900x86mm  
 Pixel Pitch: 6.67mm/8.3mm/10mm  
 Application: All kinds of stadiums.

### Key Features:

- UEFA standard design.
- 1,600x900mm cabinet size.
- Players' protective design.
- Emergency access design.
- Rotatable base.
- Dolly design for storage of cabinets.

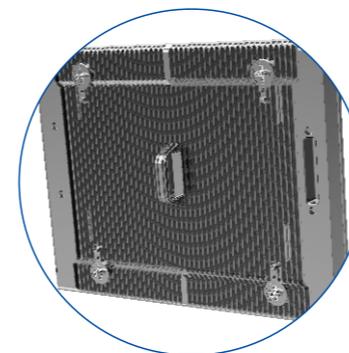

400x300mm Aluminum module



Rotatable base



Top rubber cover and soft mask.



Dolly design for storage of cabinets.

Item Number	FAB-PRP6.67	FAB-PRP8.3	FAB-PRP10
Pixel Pitch(mm)	6.67	8.33	10
Pixel Density(dots/SQM)	22,500	14,400	10,000
LED Type	SMD2727	SMD2727	SMD3535
Module Resolution(pixels)	60*45	48*36	40*30
Module Size(mm)	400*300	400*300	400*300
Cabinet Size(mm)	800*900/800*1,200/1,600*900		
Cabinet Weight(KG)	800*900: 27kg/800*1200: 34kg/1600*900: 52kg		
Brightness(Nits)	6,000	6,000	6,000
Refreshment(Hz)	3,840	3,840	3,840
Grey Scale(Bit)	14-16	14-16	14-16
Max Power Consumption(W/SQM)	580±5%	550±5%	550±5%
Ave Power Consumption(W/SQM)	174	165	165
Maintenance Type	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP66/IP66	IP66/IP66	IP66/IP66
Certificate	CE(LVD, EMC), ETL, FCC, RoHS	CE(LVD, EMC), ETL, FCC, RoHS	CE(LVD, EMC), ETL, FCC, RoHS

# Ribbon Series

## SPORTS SOLUTION



Dimension: 750x750x81mm  
Pixel pitch: 3.9mm  
Applications: All kinds of stadiums.

### Key Features:


- Customized design for stadium ribbon display.
- 750x750mm Aluminum cabinet size, light weight.
- Handles on the top, easy to pull the cabinet up with safety wire.
- Simple and strong back frame, attached onto the wall directly.
- Totally front service and taken-out service.
- Slop cover design, Prevent the audience from putting things on it.



Top handles' design, easy to take the cabinets out from the top.



Simple frame installed into the wall directly, then put the cabinets onto the frame.

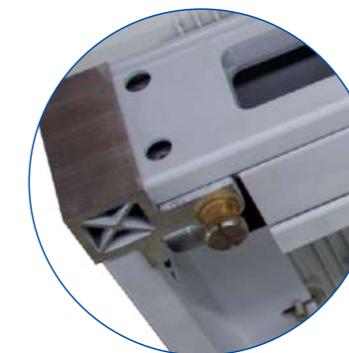

Position pin on the cabinets, easy to locate into the frame.



Ideal product for stadium ribbon display.

Item Number	FAB-RB3.9
Pixel Pitch(mm)	3.91
Pixel Density(dots/SQM)	65,536
LED Type	SMD1921
Module Resolution(pixels)	96*64
Module Size(mm)	375*250
Cabinet Size(mm)	750*750
Cabinet Weight(KG/SQM)	30
Brightness(Nits)	5,000-7,000
Refreshment(Hz)	3,840
Grey Scale(Bit)	14-16
Max Power Consumption(W/SQM)	570±5%
Ave Power Consumption(W/SQM)	171
Maintenance Type	Front/Rear
Ingress Protection	IP66/IP66

# Diamond Poster Series

PROFESSIONAL OUTDOOR  
ADVERTISING PLAYER



Dimension: 1,200x2,700x230mm  
Pixel pitch: 1.9mm/2.9mm  
Applications: Stations, airports, parking lots, streets, communities, parks, pedestrian streets, etc.

## Key Features:

- Die-casting Aluminum module and cabinet.
- RGB Deep grayscale processing.
- Stable and Reliable.
- Centralized Control.
- Easy Installation and Maintenance.



Exquisite Picture Quality



Stable and Reliable



Integrated Solutions



Cluster Control



Automatic Brightness Adjustment

Item Number	FAB-DP1.9	FAB-DP2.6	FAB-DP2.9
Pixel Pitch(mm)	1.95	2.6	2.97
Pixel Density(dots/SQM)	262,144	147,456	112,896
LED Type	SMD1212	SMD1212	SMD1515
Module Resolution(pixels)	128*128	96*96	84*84
Display Dimension (mm)	1,000*1,500	1,000*1,500	1,000*1,500
Cabinet Size(mm)	1,108*2,005*750	1,108*2,005	1,108*2,005
Cabinet Weight(KG)	146	146	146
Brightness(Nits)	3,000-4,000	3,000-4,000	4,800-5,300
Refreshment(Hz)	3,840	3,840	3,840
Grey Scale(Bit)	14	14	14
Max Power Consumption(W/SQM)	560±5%	560±5%	560±5%
Ave Power Consumption(W/SQM)	168	168	168
Maintenance Type	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP66/IP66	IP66/IP66	IP66/IP66


## Perfect round corner for 3D effect solution



Corner size: 480mmx960mm/480mmx640mm  
 Matched for: Platinum Series 5.7mm/6.67mm/8mm/10mm  
 Platinum A Series 6.67mm/8mm/10mm  
 Platinum320 Series 5.7mm/6.6mm

**Platinum VR Series**

## Perfect round corner for 3D effect solution

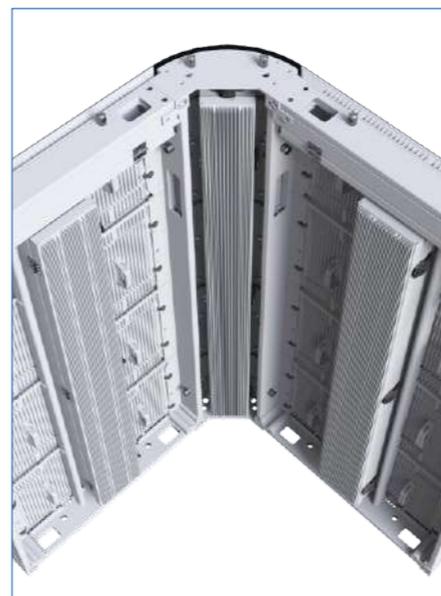

Corner size: 250mmx1000mm/250mmx750mm/250mmx500mm  
 Matched for: Platinum S Series 2.9mm/3.9mm/4.8mm  
 PTS A Series 3.9mm  
 PTF Series 3.9mm/4.8mm

**Platinum S VR Series**




# Cases

## The GATE


The Gate perfectly represents the 2023 Bergamo–Brescia project — a capital city in which culture also encompasses the value of local businesses and their innovative potential, capable of fostering the growth of people and communities. Fabulux Platinum S2.9mm perfectly shows the beauty of two cities !



Westfield Arkadia at Warsaw, Poland

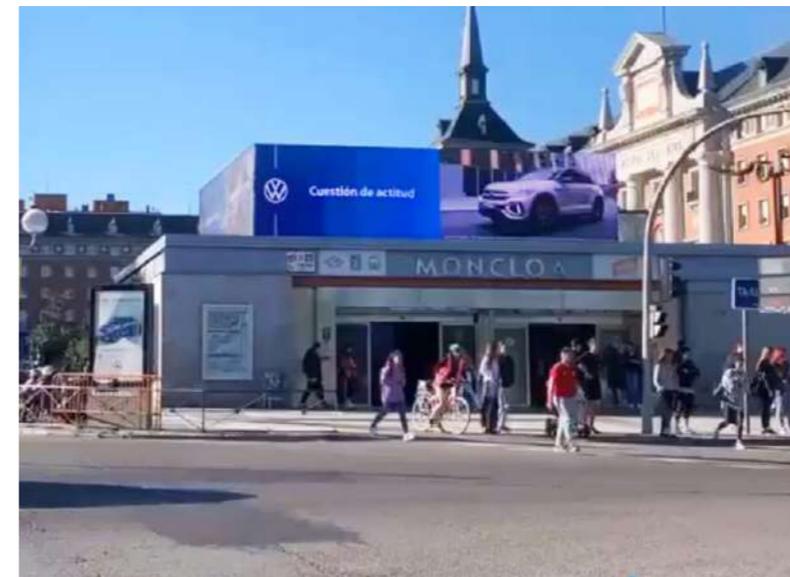

Moncloa Station At Madrid, Spain

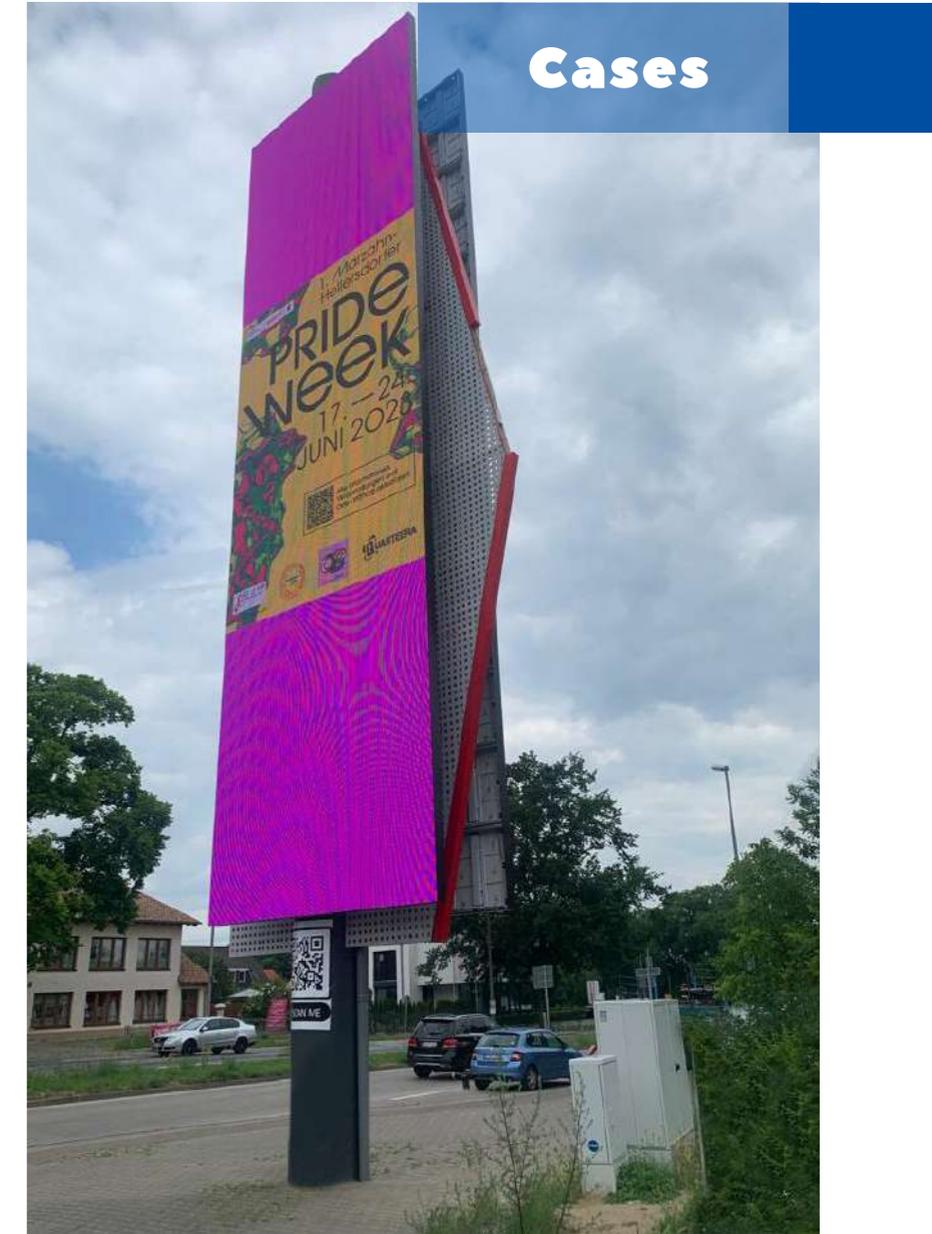

# Cases

Germany

## Cases



### AL-KHARJ, RIYADH, KSA

Fabulux LED is the originator of outdoor aluminum screen in the industry. Platinum series is designed with full aluminum module for fast heat dissipation, 10,000nits brightness against strong sunshine, energy-saving, etc. That's the reason of our partner in KSA chooses Fabulux LED! More than 60 locations are installed with Fabulux Platinum series, which is Air-conditioner free and shining at this promising land!



Al-Kharj, KSA



Dubai, UAE



Bahrain Proam 1000 ,Bahrain



Riyadh, KSA

## Cases



### SHINING TOWER, ABU DHABI

The old outdoor screen was installed at Shining Tower for long time. In order to match this high rank building, the owner decided to put a new outdoor screen. Platinum series cabinet size is 960x960mm, matched the current installation area and frame perfectly, which can save a lot of frame cost and installation time. Fabulux Platinum series brings a lot of attractions and makes it shining again!



## Cases



AL-KHARJ, RIYADH, KSA



AL-KHARJ, RIYADH, KSA



## DJAKARTA THEATRE XXI, INDONESIA

Shoot and share stunning impression in Djakarta Theatre XXI ! Visual feast created by Fabulux PT6.67mm VR outdoor 3D advertising led display +creative video effect in the prime location of the city’s busiest sector. With its features of high brightness, high refresh rate, perfect seamless corner surprises the viewers, which raises the reputation of the centre and maximises exposure and advertising effect of the brands!



Cebu Casino,Philippines



Jakarta ,Indonesia



PTA6.67mm in Manila



Seoul,South Korea



### NEW HAMPSHIRE,USA

Fabulux LED launched one of its most popular outdoor fixed installation model, Platinum series. And it is installaed at New Hampsire, opposite the big public parking area.This Platinum 8mm outdoor screen has been showing the most attractive ads.



Tennessee,USA



Florida,USA



Sao Paulo, Brazil



Charlotte, USA

## Cases



### VIKING FK, NORWAY

Viking FK is one of the largest football clubs in Norway. Situated in Stavanger, Viking is recognized as the team for the entire South-West region of Norway. Viking FK has a long and successful history including the club winning 8 league championships and 5 cup trophies.

Fabulux has provided the whole system to this famous stadium, including 250 meters long Platinum Sports 10mm screen and two scoreboards with size 9.6m x 5.44m.



## Cases



### AFC, OMAN NATIONAL STADIUM

Fabulux LED has provided 6 systems of Platinum10mm perimeter system for AFC (Asian Football Confederation). This is the latest one installed for Oman National Stadium. So far, Fabulux LED Platinum perimeter systems have been installed for National stadiums in Germany, France, Netherlands, Japan, USA, etc.





### XIAMEN CITY, CHINA

PT series, top fitting, Xiamen Giant screen, located in the core business circle of Xiamen island SM Mall Phase 1, this location is the intersection of two main roads in the island, SM Mall is the local largest shopping mall, positioning high-end shopping mall.



Nangang, Guangzhou



Outdoor 3D screen in Jinan, Shandong province



Naked eye 3D, Nanyang, Henan



3D Project, Qingmei Chengpin Mall, Taichung



### **Our Indian Address:**

KY Arcade, Metro Pillar No. 325,  
South Kalamassery Cochin-682033,  
Kerala, India

Email: nexisled@gmail.com

Email: info@nexisled.com

Email: sales@nexisled.com

Mob: +91 9446 22 1588

Mob: +91 907237 1588



### **Our UAE Address:**

First Emirates Computers & Technical Services  
Po Box: 38575, Musaffah 9  
Abu Dhabi - United Arab Emirates

Email: Sales@firstemirates.com

Email: Info@nexisled.com

Email: sales@nexisled.com

Mob: +971 55 311 2074

Mob: +91 907237 1588



### **Our KUWAIT Address:**

Nahar Al Hajiri Complex  
Floor 1, Office No. li, Block 8  
Road 28, Fahaheel - Kuwait

Email: Info@nexis.com

Email: Sales@nexisled.com

Email: nexisled@gmail.com

Mob: + 965 552 37362

Mob: +91 9072371588